

Fig.1

2
↙

```
3GPP-Assets-Info= "a=3GPP-Assets:" Asset 0*(";" Asset) CRLF
Asset = (AssetName "=" "{" Language "," textstring ")" /
      ("Rating" "=" "{" 2(4CC "," Language "," textstring) ")" /
      ("Classification" "=" "{" 4CC "," number "," Language "," textstring ")" /
      ("Keywords" "=" "{" Language "," number "," 1*(textstring ","))" /
      ("Location" "=" "{" Language "," textstring "," number "," 3(fltValue "," textstring "," textstring) ")"
AssetName = "Title" / "Description" / "Copyright" / "Performer" / "Author" / "Genre"
Language = 3(%x61-7A) ; 3 lower-case letters
textstring = *VCHAR "%0x00"
4CC = 4VCHAR
number = 1 *DIGIT
fltValue = 1 *DIGIT / ( 1 *DIGIT "," 1 *DIGIT)
```

Fig.2

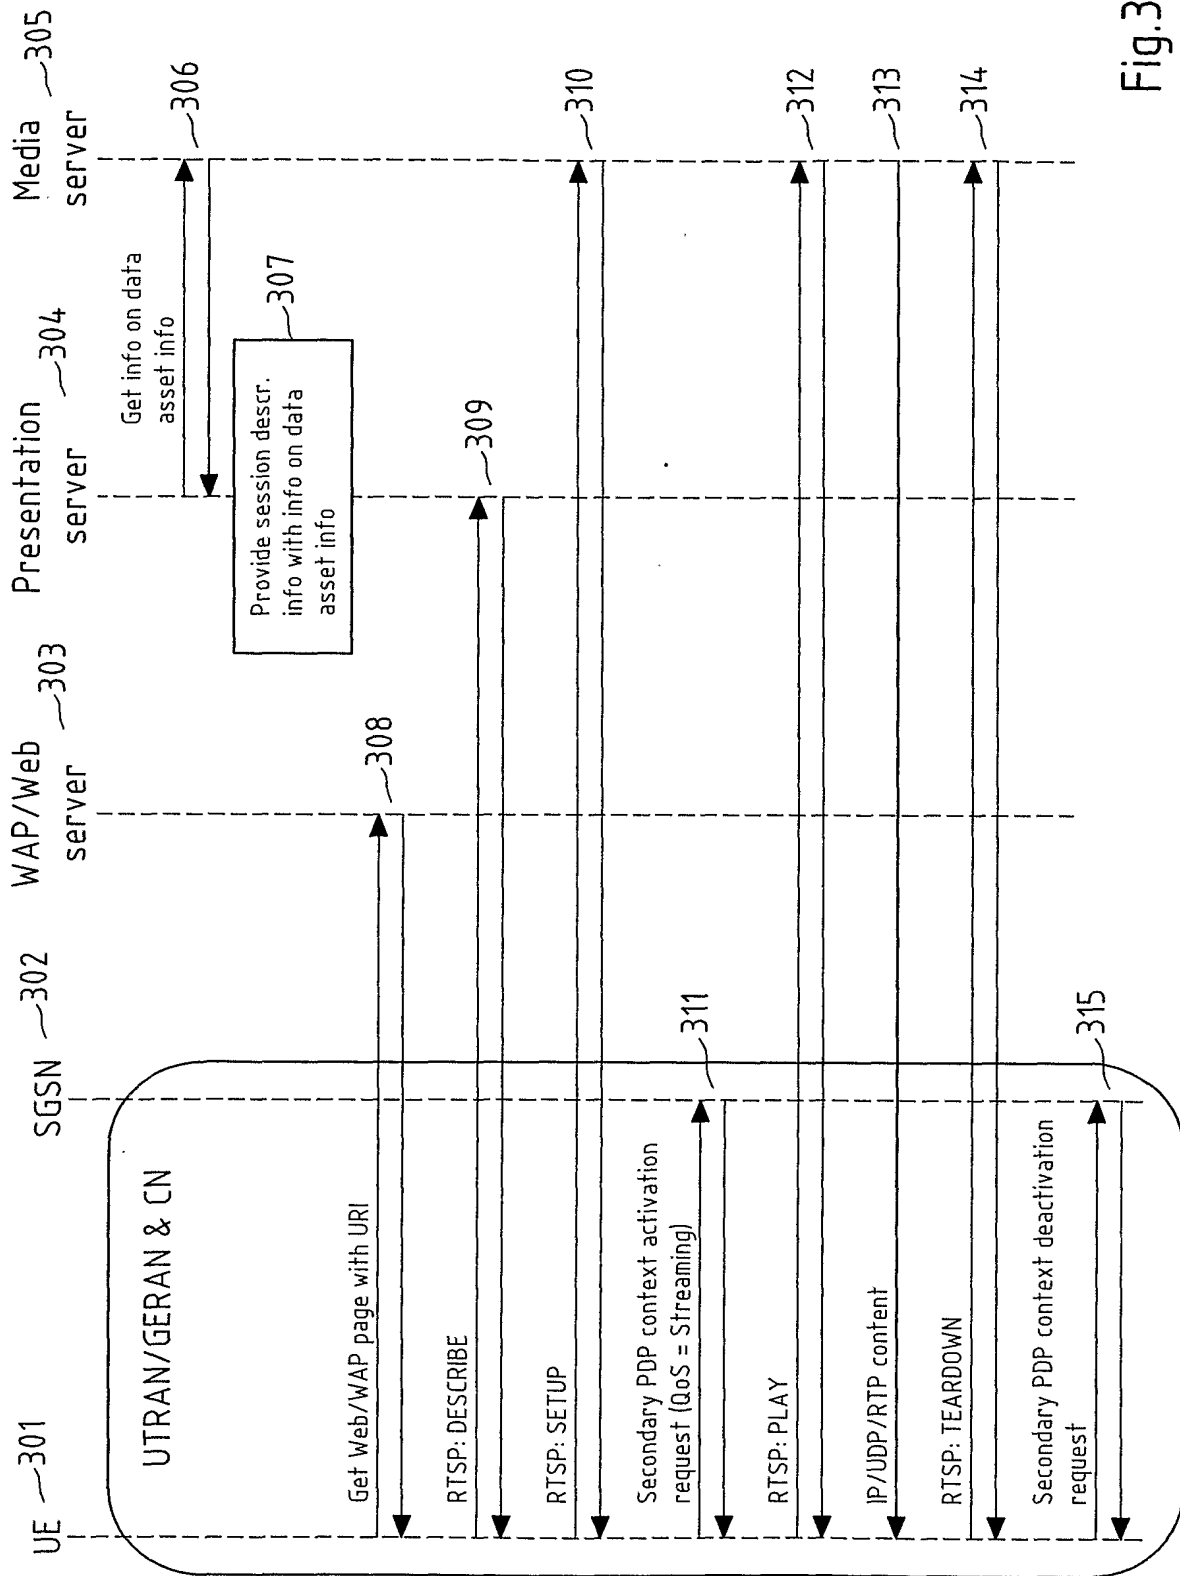


Fig.3

4/4

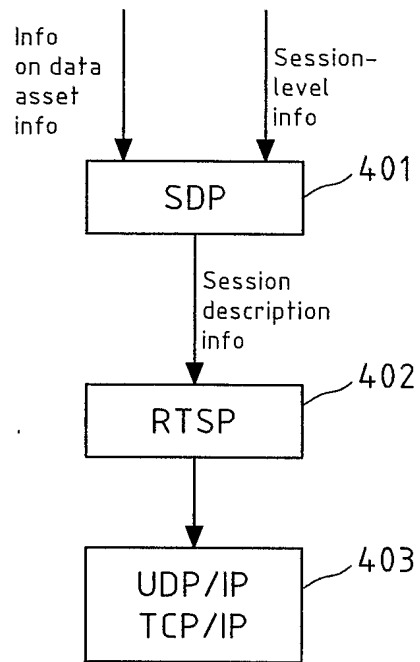


Fig.4

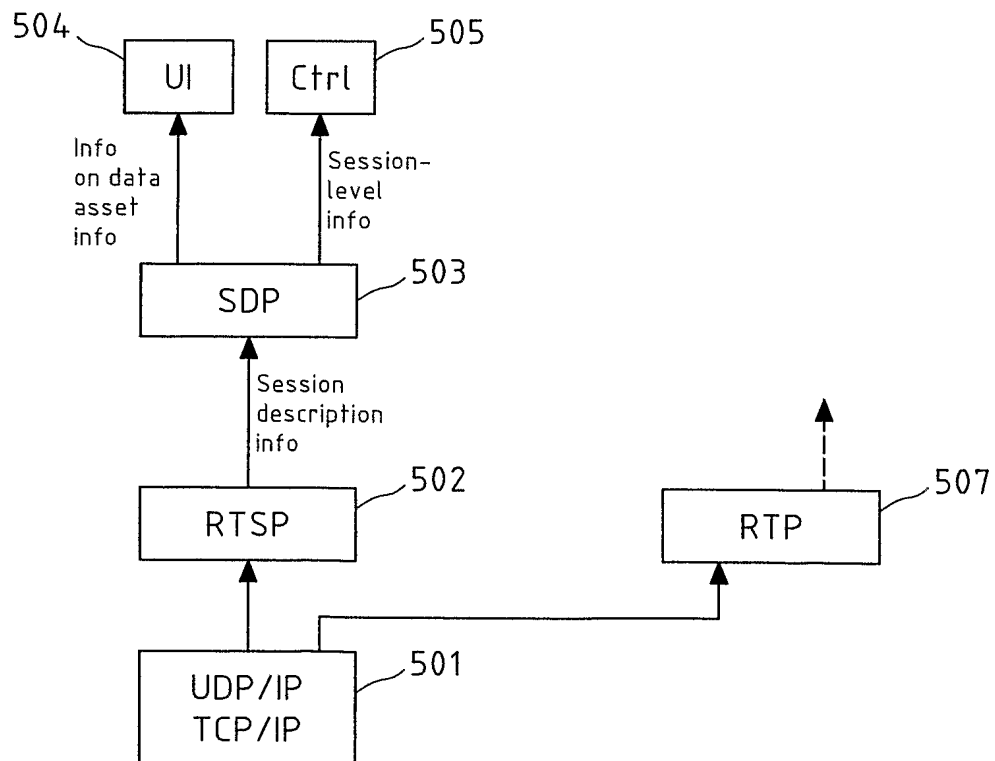


Fig.5